



## Electric Scissor Lifts I



# JCPT(I)



Rails folded

### JCPT8(I)/JCPT9.5(I)

	S.W.L	
	JCPT8(I).....	450 kg
	JCPT9.5(I).....	400 kg
	S.W.L on extension.....	112 kg
	Working height	
	JCPT8(I).....	10.00m
	JCPT9.5(I).....	11.50m
	Platform floor height	
	JCPT8(I).....	8.00m
	JCPT9.5(I).....	9.50m
	Overall length.....	2.51m
	Overall width.....	1.15m
	Overall height.....	2.45m
	Platform size.....	2.50 X 1.12m
	Platform extension size.....	1.27m
	Ground clearance.....	0.12m
	Wheelbase.....	2.08m
	Turning radius	
	Inside/Outside.....	1.93/3.74m
	Drive motors.....	2X24VDC/1.5kw
	Lifting motor.....	24VDC/3kw

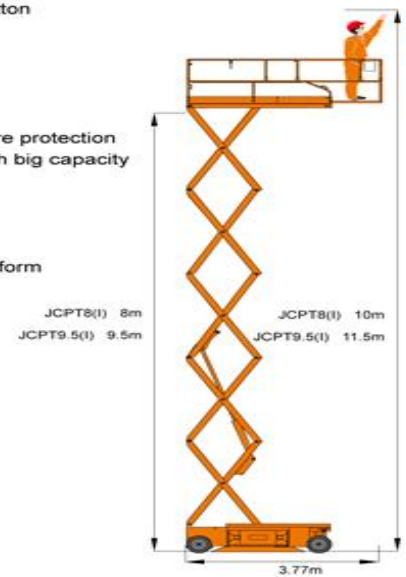

	Travel speed	4 km/h
	Stowed.....	1.1 km/h
	Raised.....	
	Up/Down speed	
	JCPT8(I).....	70/60 sec
	JCPT9.5(I).....	89/88 sec
	Batteries.....	4X6V/250Ah
	Integrated charger.....	24V/25A
	Gradeability.....	35%
	Maximum slope.....	3°
	Tyres.....	φ406X125mm
	Weight	
	JCPT8(I).....	2200kg
	JCPT9.5(I).....	2280kg

#### Standard equipment

- Can Bus Technology
- Proportional controls
- Automatic Pothole Protection
- Battery charge indicator
- Swing gate on platform
- Hour Meter
- Safety brackets
- Forklift pockets
- Fault indicator on platform
- Low voltage alarm
- Emergency down button
- Extended platform
- Charger protection
- Horn
- Tilt alarm
- Tilt protection
- Controller temperature protection
- Traction batteries with big capacity
- Over loading limited
- 2WD

#### Options

- AC power on the platform
- Flashing beacons



סי.איי.אל חברה להנדסה בע"מ

מפיצים יבואנים בישראל

טלפון: 08-9330799, פקס: 08-9330804

www.cil1.com

